

## Navigator

Lets you browse through several pages of the display and select a line (the bottom line is implicitly active).



## Guide key

This key lets you:

- obtain information about the telephone
- program the keys

## Display and display keys

Displays 2 lines and several pages giving information on your correspondent and the functions available through the keys associated with the lines of the display screen.

- Store#** call required number.
- Lock** Prohibit outside calls.
- Appointment** Make an appointment.
- PickUp** Pick up a call to another number.
- Divert** Divert your calls to another number.
- Read** Display more information if required.
- Dusto** Customize your terminal.
- General** Programme company data.

## Programmable keys and icons

To make a call, activate a service or manage your calls. Icons are associated with each of these keys.

### Call icons:

- Incoming call (flashing).
- Call in progress.
- Call on hold.
- Call on common hold.

### Function icons:

- Function active.
- Function requiring action.
- Terminal or line busy.

### Preprogrammed function keys:

- Divert your calls to another terminal.
- Access the various mail services.
- Access your personal directory.
- Transfer call to another terminal.
- Make an ISDN call.

## Light

indicating messages received.

Mute key so that your correspondent can no longer hear you.

Hang-up key To terminate a call or programming.

## Audio keys

- Loudspeaker:** to share a conversation to reduce loudspeaker or receiver volume
- Hands free:** to make or answer a call without lifting the receiver to increase loudspeaker or receiver volume

## Alphabetic keypad

Protected by a flap, used for call by name, message service and programming. You have a self-adhesive "Memo" label to stick inside the flap.

## Warning

The earcap region of this telephone may attract and retain small metallic objects.

## Guarantee and clauses

We, Alcatel Business Systems, hereby declare that we assume the Alcatel Advanced Reflexes product to be compliant with the essential requirements of Directive 1999/5/CE of the European Parliament and Council.

Any unauthorised modification to the product shall render this declaration of compliance null and void. A copy of the original of this declaration of compliance can be obtained by post from :

Alcatel Business Systems - Technical Services - Approvals Manager  
1, route du Dr. Albert Schweitzer - F 67408 Illkirch Cedex - France



## Receiving a call



lift the receiver hands free

## Redialling



select the "Redial" function select the No. in the last ten issued call required number

## Requesting automatic callback if internal number is busy



## Directory

## Using call by name



enter the first letters of the name

## Programming your personal directory



press a display key enter the name of your correspondent



enter number for correspondent

## Calling from your personal directory



navigate in the name list call the chosen correspondent

## Divert your calls to another number

## Divert your calls to another number




number to be called

## Using your telephone

## Identify the terminal you are on

Press this key twice.

## Making a call



lift the receiver hands free programmed line key dial the number for your call

To make an external call, dial the outside line access code before dialling your correspondent's number.

## Diverting your calls to your voice message service



## When you return, cancel all diversions



## During a conversation


### Sending DTMF signals

During a conversation you sometimes have to send DTMF signals, such as with a voice server, an automated attendant or a remotely consulted answering machine. The function is automatically cancelled when you hang up.




### Calling a second person during a conversation

During a conversation, to call a second person.

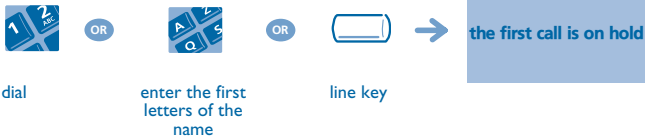

### Receiving a second call

During a conversation, another person is trying to call you.

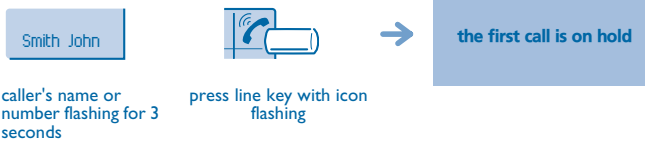


### Switching between two calls (Broker call)

During a conversation, a second call is on hold. To accept the second call:



### Transferring a call

During a conversation, to transfer the call to another number.




## Three-way conference

During a conversation, a second call is on hold.



## Store a number

To store the displayed number in the personal directory while a communication is in progress:

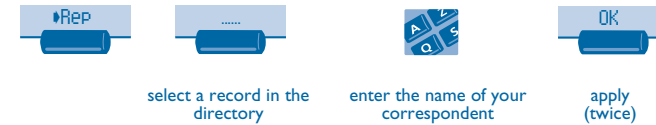

## Voice message service

### Initializing your voice mailbox




### Modifying your personal code

Your personal code is used to access your voice mailbox and to lock your telephone.



### Consulting your voice mailbox

The light indicates that messages have been received.

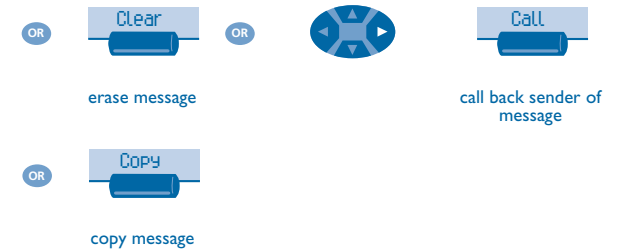

## Customize your terminal

### Adjusting the audio functions




### Adjusting screen brightness



### Installing the programmable key label

A printed label is supplied with the terminal. This should be installed beneath the programmable keys.

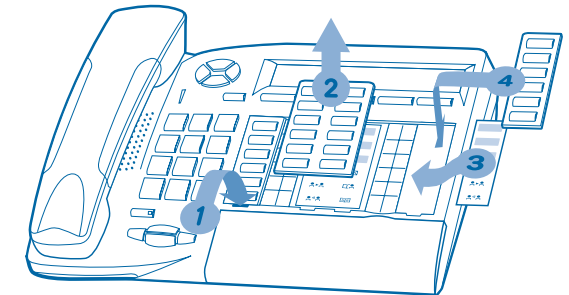

1. Insert a flat "blade" into the slot (1 slot per key block).
2. Raise the cover.
3. Slide the printed label into position.
4. Replace the cover.